

TECHNICAL SPECIFICATION

EMERGENCY FIXTURE XL102LED



Technical data

<i>Rated voltage:</i>	127-220V/ 50Hz
<i>Power:</i>	30x 0,067W;
<i>Battery:</i>	Lithium 3.7V/1000mAh
<i>Charging:</i>	220V: 12h; 12V: 24h
<i>Discharge time:</i>	5h
<i>Colour temperature:</i>	6000K;
<i>LED source:</i>	SMD 2835
<i>Colour body:</i>	White
<i>Body:</i>	PVC
<i>Colour rendering index:</i>	Ra≥80
<i>Long life:</i>	20 000h
<i>Protection against dust and moisture:</i>	IP21

» *Two files dimming*

» *Over charge protection*


Features

- o Clearly indicates directions to emergency exits in panic situations
- o Automatic switch-on in case of power failure
- o Low power consumption

Area of application


- o Public buildings
- o Commercial buildings
- o Administrative buildings
- o Residential buildings
- o Banks
- o Hospitals
- o Schools

Variants and Dimensions

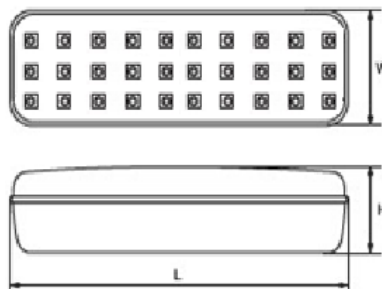

Model	Watt	Whole fixture lumens	Colour temp.	Size (mm)			Catalogue number
	(W)			(lm)	(K)	Length	
XL102LED	30x0,067	100	6000	200	32	54	9XL102LED

Energy efficiency

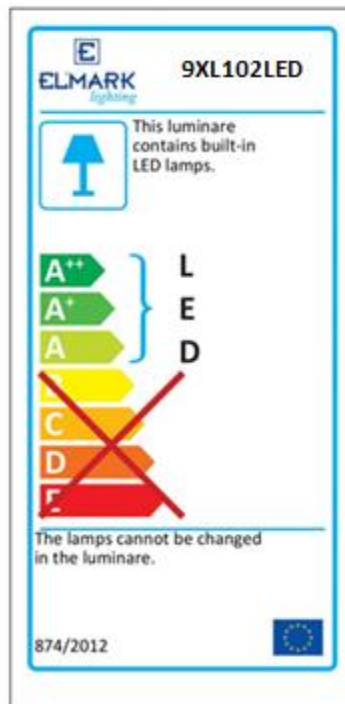

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-4 • EN 60598-2-22
- EN 13032-4 •

